

A

B

C

D

E

F

A

B



C

D

E


F

5	0010628401	CuZn	gal Ni
4	0010628291	CuZn	gal Tin
3	0010628261	CuZn	gal Tin
2	0010628201	CuZn	gal Tin
1	0010628001	CuZn	NATURAL
POS	CODICE	MATERIALE	FINITURA


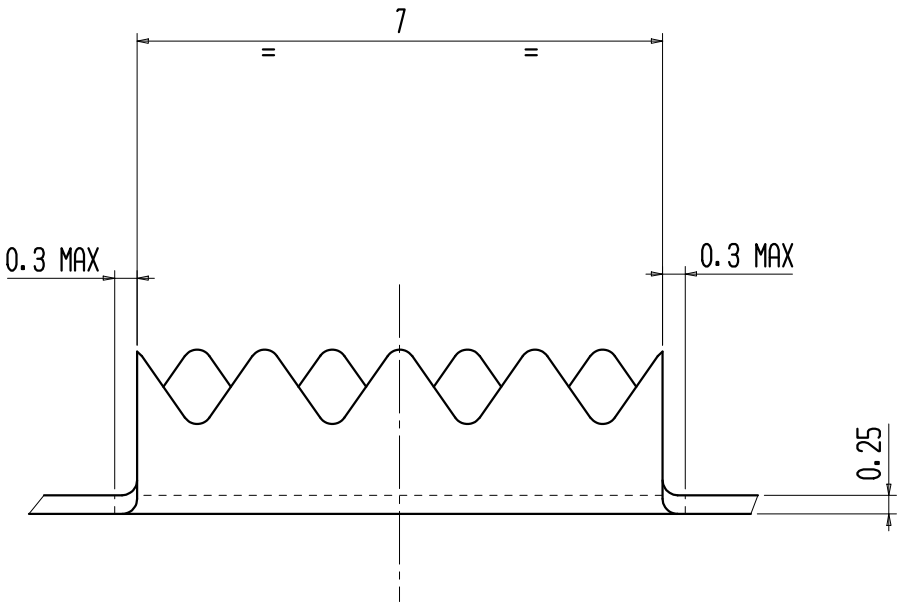


01

Copper wire range: 0.75 mmq
Crimping through mini-applicator AT750210628WC



Copper wire range: 0.25 mmq - 0.35 mmq - 0.5 mmq
Crimping through mini-applicator AT750210628WF

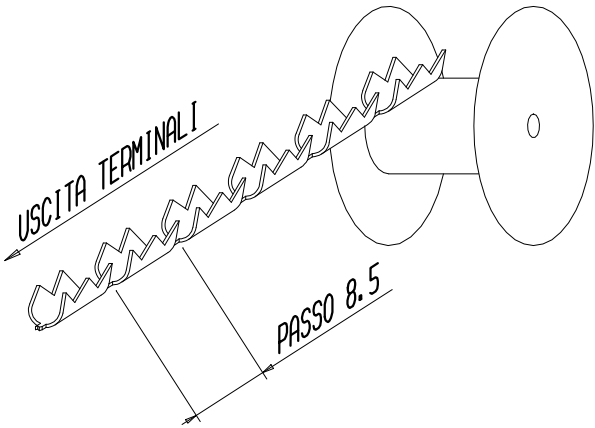

DISEGNO PER CLIENTE

SOLO PER RIFERIMENTO

CUSTOMER DRAWING

FOR REFERENCE ONLY

ORDER N.		GENERAL TOLLERANCE		Angularity		Non Dimensioned Edges		Surface Roughness		 Connecting energy. Energia in connessione Inarca spa • Vigodarzere (PD) Italy								
DRAWING N. PL10628																		
VERSION 6 MOD. INDEX 7																		
PROJECT																		
										RED. FORTUNA DT. 05/02/1991								
										APP. TONIOLO DT. 12/09/2017								
										RIL. TONIOLO DT. 12/09/2017								
										PUB. DT.								
mm INCH 		LINEAR TOLLERANCE		Size	fino a 3	> 3 a 6	> 6 a 10	> 10 a 18	> 18 a 30	> 30 a 50	> 50 a 80	> 80 a 120	> 120 a 180	> 180 a 250	> 250 a 315	> 315 a 400	> 400 a 500	
					±	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11	0.13	0.15	0.16	0.18	0.2
		ISO J13			±	0.07	0.09	0.11	0.14	0.17	0.2	0.23	0.27	0.32	0.36	0.4	0.45	0.5
					±	-	-	0.75	0.9	1.05	1.25	1.5	1.75	2	2.3	2.6	2.85	3.15

NAME POINT TERMINALS WITHOUT INSULATION CRIMPING L=7 MM

INARCA S.p.a. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.