

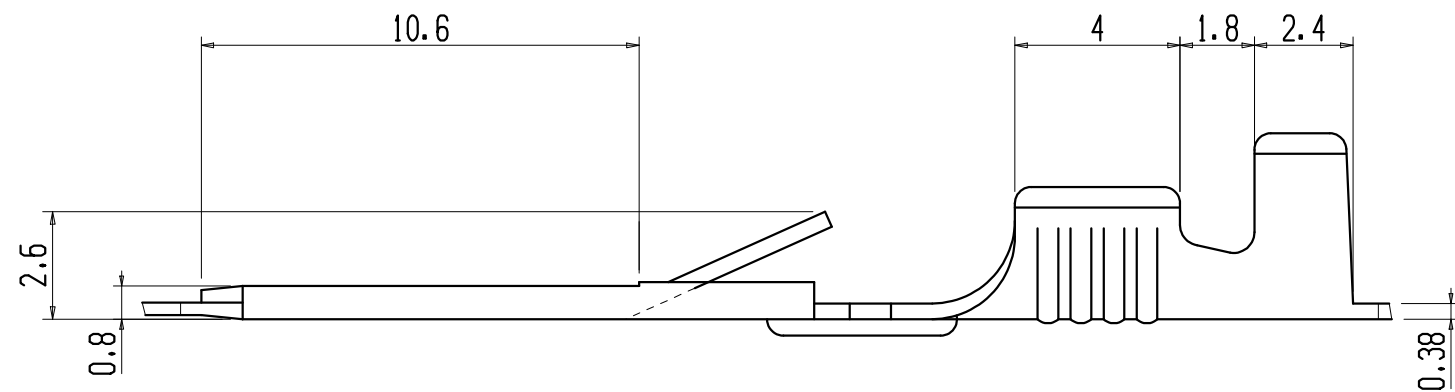


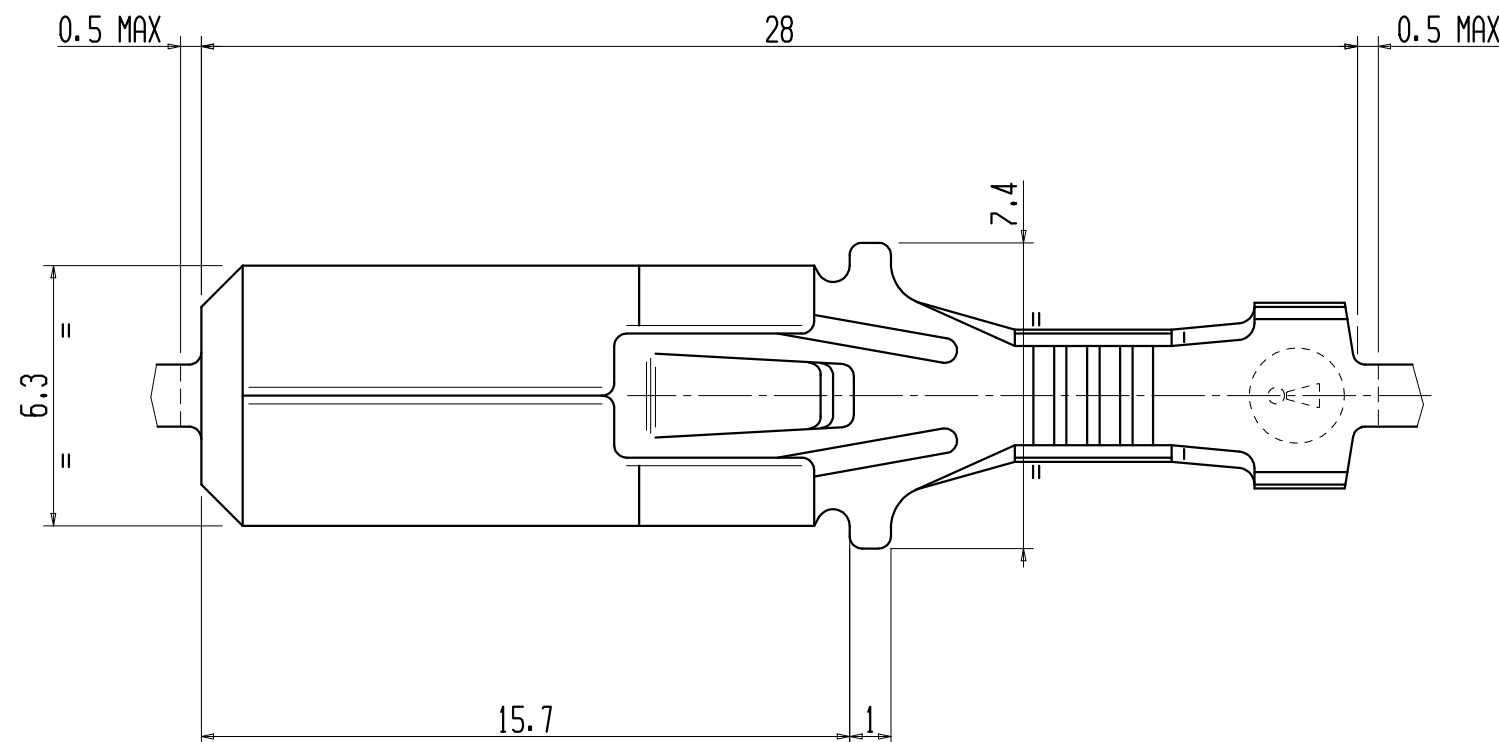

- 01 Suitable for female terminals 6,3 x 0,8 mm (DIN46340)
- 02 Wire range: 0,5 - 1,5 mmq
Sheat range: 1,9 - 3,3 mm
Crimping with miniapplicator AT750210980

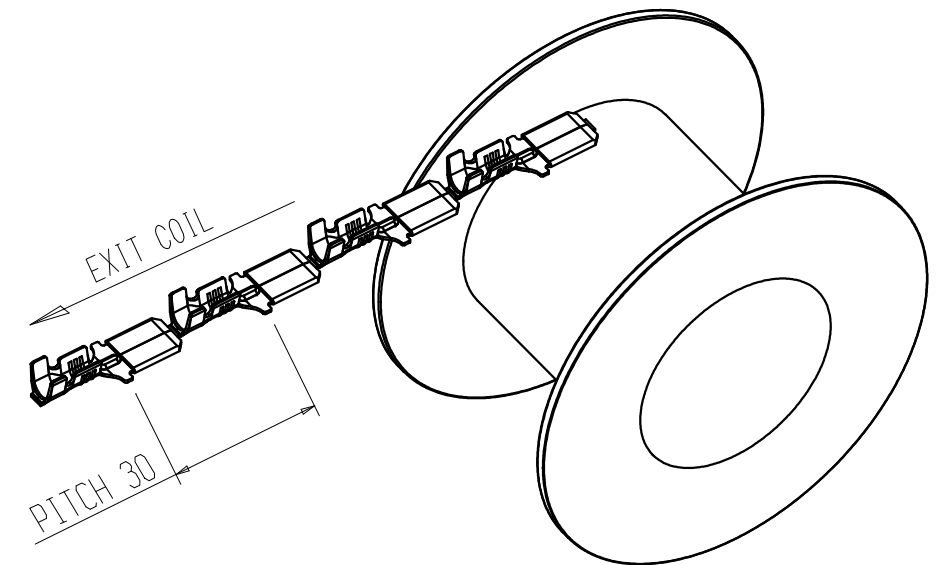

0110981201	CuSn	TinPlated	
0110981001	CuSn	-	
0010981201	CuZn	TinPlated	
0010981001	CuZn	-	
CODE	MATERIAL	SURFACE FINISH	VALIDATION

DISEGNO PER CLIENTE		CUSTOMER DRAWING	
SOLO PER RIFERIMENTO		FOR REFERENCE ONLY	
ORDER N.	GENERAL TOLERANCE	Angularity	Non Dimensioned Edges
DRAWING N. PL10981	MATERIAL	Surface Roughness	
VERSION 7 MOD. INDEX	HEAT TREATMENT		
PROJECT	FINISHING		
	LINEAR TOLERANCE ISO J13	TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.2 mm	
NAME TAB 6.3X0.8 FOR MULTI-WAY CONNECTIONS (WITH TOOTH WITHOUT HOLE) 0.5-1			
INARCA S.p.a. PADOVA ITALY ACCORDING TO THE LAW RESERVES THE RIGHT OF PROPERTY OF THE PRESENT DRAWING AND ITS REPRODUCTION AND/OR TRANSMISSION WITHOUT EXPRESS AUTHORIZATION BY THE COMPANY IS FORBIDDEN.			

RED. BOISCHIO	DT. 07/01/1987
APP. TONIOLO	DT. 05/11/2019
RIL. TONIOLO	DT. 05/11/2019
PUB.	DT.