




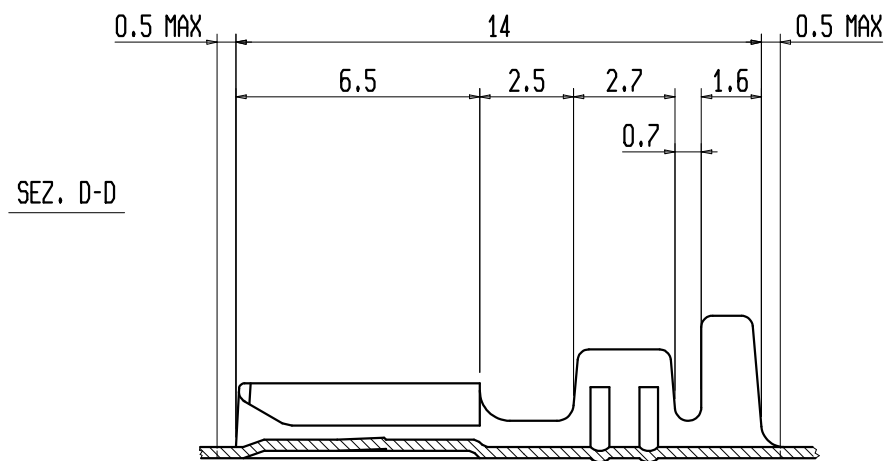

SEZ. A-A

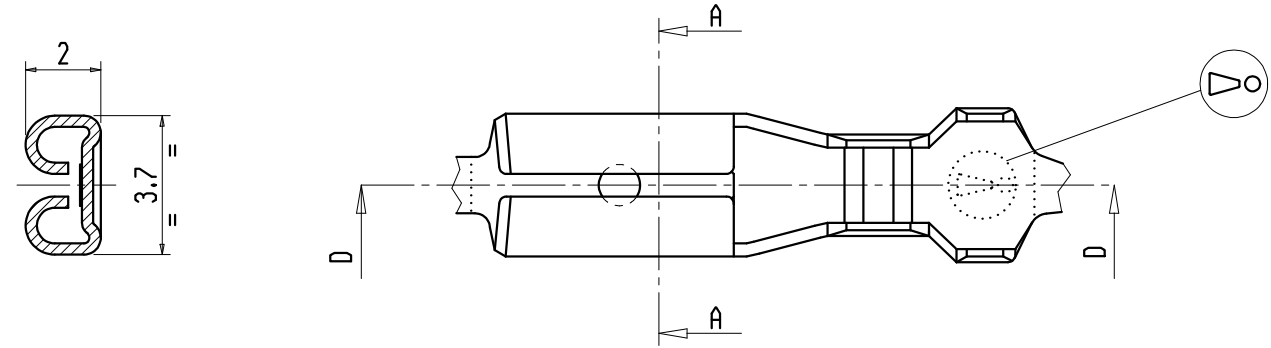

- 01 Terminal in accordance with Product Technical Specification code STP0110.0280.0000
- 02 Mating with TAB terminal 2,8 x 0,5 mm DIN46244
- 03 Crimping wire section: 0,5 - 1,5 mmq
Sheat diameter : 1,9 - 3,3 mm
Crimped with frontal mini-applicator code AT750210246

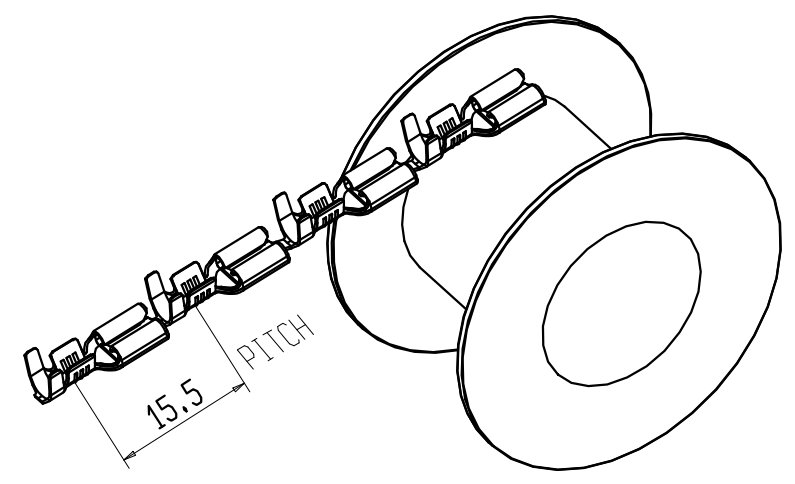

6	0910280001	CuNiZn	NATURAL
5	0210280401	Steel	gal Ni
4	0110280001	CuSn	NATURAL
3	0010280201	CuZn	gal Tin
2	0010280001	CuZn	NATURAL
1	0010280000	CuZn	NATURAL
POS	CODICE	MATERIALE	FINITURA

DISEGNO PER CLIENTE
SOLO PER RIFERIMENTO

CUSTOMER DRAWING
FOR REFERENCE ONLY

COMMESSA N.	TOLLERANZE GENERALI	Angolari	Spigoli non quotati	Grado di lav.o rugosita'	 Connecting energy. Energia in connessione Inarca spa - Vigodarzere (PD) Italy												
DISEGNO N. PL10280	MATERIALE																
PROGETTO	TRAT. TERMICI																
SCALA	FINITURA																
QUANTITA'	TOLLER. LINEARI	Dimensioni	fino a 3	> 3 a 6	> 6 a 10	> 10 a 18	> 18 a 30	> 30 a 50	> 50 a 80	> 80 a 120	> 120 a 180	> 180 a 250	> 250 a 315	> 315 a 400	> 400 a 500	RED. BOISCHIO	DT. 29/03/1983
	ISO J13		± 0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11	0.13	0.15	0.16	0.18	0.2	APP. TONIOLO	DT. 11/05/2012
			± 0.07	0.09	0.11	0.14	0.17	0.2	0.23	0.27	0.32	0.36	0.4	0.45	0.5	RIL. TONIOLO	DT. 11/05/2012
			± -	-	0.75	0.9	1.05	1.25	1.5	1.75	2	2.3	2.6	2.85	3.15	PUB.	DT.
NOME	TERM.FEMM.DIR.2,8X0,5 0,5-1,5																
QUESTO DOCUMENTO E' DI PROPRIETA' INARCA PADOVA ITALY. IL SUO CONTENUTO E' RISERVATO E PROTETTO A TERMINE DI LEGGE CON DIVIETO DI RIPRODUZIONE E DIVULGAZIONE ANCHE PARZIALE A TERZI SENZA ESPLICITA AUTORIZZAZIONE																	